



# MAX SERIES

- #1 Selling Tractor in the World
- 98% Customer Loyalty Rating
- 7-year Limited Powertrain Warranty



DEMING PRIZE  
2003



JAPAN QUALITY MEDAL  
2007

**Mahindra**  
Tractors



## VERSATILITY - Max Series

Industry-redefining eco-friendly Tier IV sub-compact and mid-compact models. The backbone of all Max series tractors is a full-length tractor frame that will allow users to install a backhoe at any time. The Max series have a wide range of attachments and implements, including a driver-over mowing deck, snow blowers, blades, brooms and feature the highest capacity loaders in the market.

### Key Features:

- Max Versatility – Choose up to 15 implements to handle any task
- Max Maneuverability – Best in class turning radius to get work done in tight spaces
- Max Comfort – Easy turn seat for Tractor – Loader – Backhoe operation, easy on and off with an open platform.


### Ideal For:

- Specialty / Hobby Farming
- Rural Lifestyle
- Equine

- Max Stability – Bigger tires, better traction, stability and safety for all jobs
- Max Lift Capacity – Lift more, carry more, pull more and get more done
- Max Engine Performance – 28% lower RPM results in smooth, quiet operation and less fuel consumption
- 7-year limited powertrain warranty\*

- Home
- Grounds Maintenance / Municipal

\*See Mahindra warranty and your dealer for details

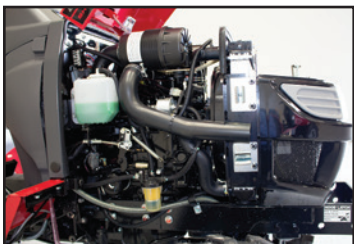

Engine - right side view



Dash panel



Mower

- Easy access to engine and maintenance items
- Lower rated engine rpm, means longer life, less noise, and better fuel efficiency
- Powerful and reliable Mitsubishi engine

- Clear view, easy-to-read instrument panel
- Brilliant backlighting
- Colorful warning lights that quickly inform the operator when service is required

- Drive over deck for easy installation and removal
- Excellent cutting quality
- Available mulch kit

# EXCEPTIONAL PERFORMANCE. GREAT VALUE.



**Engine** - 3 cylinders, four-cycle, indirect-injection, water-cooled diesel

**Transmission** - HST - 2 ranges (MAX 24) or constant mesh and synchro mesh on F/R shuttle (both available on MAX 26XL)

**Hydraulics** - Open center, full-lift with position control

**Operating Weight** - 1,693 to 2,857 lbs. (varies by model) - sturdy, well-built, steel mid-compact chassis

**Horsepower** - 24.4 - 25.6 (depending on model)

**Tires** - Ag, industrial or turf

**Loader** - Lift up to 1,400 lbs. at 82.7" high with the MAX 26L front loader

**Warranty** - 7-year limited powertrain (See Mahindra warranty and your dealer for details)



**Max 24 HST**





## AVAILABLE IMPLEMENTS


Mahindra offers a huge selection of implements to help you accomplish whatever task you wish to tackle and provide a complete Mahindra experience.

- Wide array of implements (186 variations)
- Competitive financing terms
- Standard-, Medium-, and Heavy-Duty implements to meet your needs
- Implements feature rugged construction with heavy-duty components
- 5-year rotary cutter gearbox limited warranty
- SNOW BLOWERS and SNOW REMOVAL equipment to meet cold-weather needs
- BEST VALUE in the market today



# TRACTOR ATTACHMENTS

TRACTOR	MAX 24 HST	MAX 26XL SHUTTLE	MAX 26XL HST	MAX 26XL HST Cab
<b>LOADER</b>	MAX 24L		MAX 26L	
Maximum Lift Height	75"		82.7"	
Clearance with Attachment Dumped	60"		67.3"	
Reach at Maximum Height	23"		29"	
Maximum Dump Angle	38°		32°	
Attachment Rollback Angle	20°		24°	
Digging Depth Below Grade	4"		2.6"	
Lift Capacity to Full Height @ Pivot Pins	900		1402	
Breakout Force @ Pivot Pins	2000		2690	
Rated Flow (Tractor System)	4.6 gpm		4.6 gpm	
Attachment Width	50"		48"	
Attachment Rated Capacity	7 cu. ft.		7 cu. ft.	
Cycle Times @ rpm	2500		2600	
Raise Boom (seconds)	3.7		3.3	
Lower Boom (seconds)	2.6		2.4	
Dump Attachment (seconds)	3.4		2.2	
Retract Attachment (seconds)	2.9		2.6	
Transport Weight (lbs.)	545		627.2	
<b>BACKHOE MODEL</b>		26B		N/A
<b>TRANSPORT</b>				
Transport Height (maximum)		71"		N/A
Transport Overhang		39"		N/A
<b>OPERATIONAL</b>				
Maximum Digging Depth		80"		N/A
Digging Depth (2 Ft.) Flat Bottom		78.5"		N/A
Overall Operating Height - Fully Raised		104.8"		N/A
Loading Height (bucket at 60°)		65"		N/A
Loading Reach (bucket at 60°)		40"		N/A
Reach From Swing Post		102"		N/A
Bucket Rotation		180°		N/A
Swing Arc		150°		N/A
Stabilizer Spread Operating Position		74"		N/A
Stabilizer Down Below Grade		6"		N/A
System Relief Valve Setting (psi)		2000		N/A
Digging Force - Bucket (lbs.)		2270		N/A
Digging Force - Dipper (lbs.)		1248		N/A
Transport Weight (lbs.)		710		N/A



TRACTOR	MAX 24 HST	MAX 26XL SHUTTLE	MAX 26XL HST	MAX 26XL HST Cab
<b>ENGINE</b>				
Type	Four-stroke, indirect-injection water-cooled diesel			
Cylinders	3			
Engine HP (kW) @ rpm (EPA Certification)	24.4 [18.2] @ 2500 (T4)	25.6 [19.1] @ 2600		
Compression Ratio	22:1			
Displacement cubic inch <sup>3</sup> (cc)	80.4 [1318]			
Fuel Tank Capacity	6.1 gallons			
<b>ELECTRICAL</b>				
Battery Capacity	12 volt, 45 amp hours			
Alternator	12 volt, 50 amp hours			
<b>CLUTCH</b>				
Type	Single plate, dry			
<b>TRANSMISSION</b>				
Type	HST - 2 ranges	Synchro mesh F/R shuttle and constant mesh on gear shift	HST - 2 ranges	
Number of Gears / Speeds	Infinite	8F / 8R	Infinite	
<b>STEERING</b>				
Type	Hydrostatic Power			
Pump Output (gallons per minute)	2.7			
<b>BRAKES</b>				
Type	Wet disc			
<b>HYDRAULIC SYSTEM</b>				
Type	Open center, full live hydraulic with position control			
Pump Output (gallons per minute)	4.6	5.8		
3-Point Linkage	Category 1, with check chains			
Lift Capacity (lbs.)	1400	2205		
Rear Auxiliary Remote Valves	1 spool optional			
<b>PTO</b>				
Type	Live	Trans	Live	
PTO RPM (engine rpm)	540 @ 2376			
Mid PTO RPM (engine rpm)*	2000 @ 2556	2000 @ 2526		
PTO HP (kW)	19.5 [14.4]	21.5 [16]	20 [14.9]	
<b>OPERATING WEIGHT</b>				
Total (lbs.)	1693	1819	1863	2587
<b>DIMENSIONS with Ag Tires</b>				
Overall Length Inches (mm)	104.1 [2645]	109.3 [2775]		
Overall Width Inches (mm)	50.7 [1290]	54.3 [1380]		
Overall Height Inches (mm) [with Industrial Tires]	81.5 [2070]	84.3 [2140]	82 [2082]	
Turning Radius Min. Feet (meters)	7.2 [2.2]	6.6 [2.0]		
<b>TIRES Sizes and Options</b>				
Ag (Front / Rear)	6x12 / 9.5x16	7x12 / 9.5x16		
Industrial (Front / Rear)	20x8-10 / 27x12.5-15	23x8.5-12 - 12x16.5		
Turf (Front / Rear)	20x8-10 / 29x12.5-15	23x8.5-12 / 33x12.5-16.5		

Specifications and design subject to change without notice.